


Vitrale_Surface

Description / Application

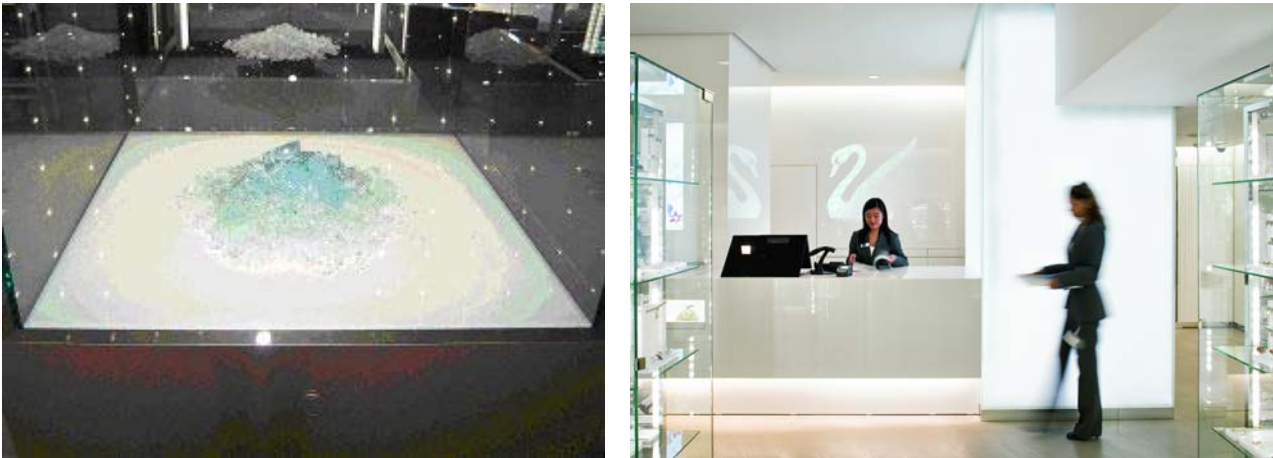

Showcase lighting consisting of luminaire body and glass floor for “staging” an exhibit.

Technical Information

Supply voltage	12V
Power consumption	46W
Dimensions	548x548
Available	6-8 weeks
Material	LED Boards in combination with Glass
Weight	~ 250g
Temperature range	0 + 45°C
Insulation class	1
Protection class	-
Certificates	CE
LED	Low Power LED
Steuerung	-
Luminous flux	800lm – Luminance: ~ 250 cd/qm
Colour temperature	4200K
Angle of reflected beam	140°
Installation	Recessed luminaire behind diffuser (e.g glass) for homogenous illumination